

## FullAXS – Field Installation Kit



### Features


- Ruggedized sealing system for fiber-to-the-antenna and industrial application
- Open bulkhead for easy access to SFP
- Positive mechanical feedback to operator when fully mated
- Useable for LC Duplex, RJ45, Power
- Robust bayonet locking for easy, fast, and secure mating
- Water proof (IP 65), dust proof and corrosion resistant

### Specifications

Mating mechanism		bayonet style locking
Housing material		high performance plastic
Mechanical performance	tensile load	150 N
	static side load	30 N
Operating temperature		- 40 °C to + 70 °C
Mating durability	IEC 61300-2-2	100 cycles
Ingress protection (mated)	IEC 60529	IP 65
Vibration	IEC 61300-2-1	passed 10 Hz – 500 Hz / 10 g
Performance standards	IEC 61753-1 cat. E	compliant
	Telcordia GR 3120	compliant
Dimensions	Length	590mm
	Diameter	Ø 36 mm
Cable diameter		Ø 4.5 - 9 mm


# FullAXS – Field Installation Kit

## Ordering information

Item no.	Connector	Picture
84143964	FullAXS adapter	

FullAXS is a registered trademark of TE.

Type: FullAXS Installation Kit

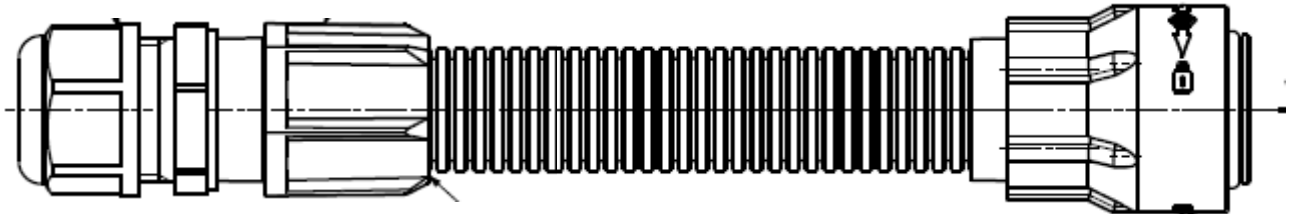

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 and IRIS.

### WAIVER

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER AG  
Degersheimerstrasse 14  
9100 Herisau/Switzerland  
Tel. +41 71 353 4111  
Fax +41 71 353 4590  
info@hubersuhner.com

hubersuhner.com

