

## Coaxial Adapter 7-16 female - female

Coaxial Adapter, 7-16 Female/Female



### Technical Features

#### STRUCTURE

Product Line		Coaxial Cable Components
Product Type		Coaxial Adapter
Coaxial Cable Type		Foam Dielectric, Ultraflexible Foam Dielectric , Radiating Cable

#### MECHANICAL SPECIFICATIONS

Connector A		7-16 DIN Female
Center Contact Connector A		Copper alloy, gold plated
Outer Contact Connector A		Brass, Tin-Zinc-copper alloy plated
Connector B		7-16 DIN Female
Center Contact Connector B		Copper alloy, gold plated
Outer Contact Connector B		Brass, Tin-Zinc-copper alloy plated
Dielectric		PTFE
Sealing class		IP68, connected

#### ELECTRICAL SPECIFICATIONS


Frequency Range	MHz	DC - 7500
VSWR, Return Loss	VSWR (dB)	0-2000 MHz: 1.02 (40) 2000-3700 MHz: 1.03 (36)
Insertion Loss (Max)	dB	0.02
3rd Order IM Product @ 2x20 Watts	dBc	< -165

#### TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-45 to 85 (-49 to 185)
-----------------------	---------	------------------------

#### PACKAGING INFORMATION

Package Quantity		1
Weight	kg (lb)	0.12 (0.27)

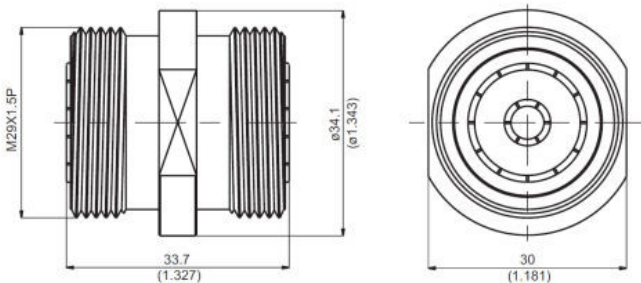

Dimensions 716F-716F



## Coaxial Adapter 7-16 female - female

### External Document Links

### Notes

Additional Packing Information:

- Weight incl. packing: 134 g
- Packing Dimensions: 40 x 40 x 87 mm